




# More Precision

scanCONTROL // 2D/3D Laser profile sensors



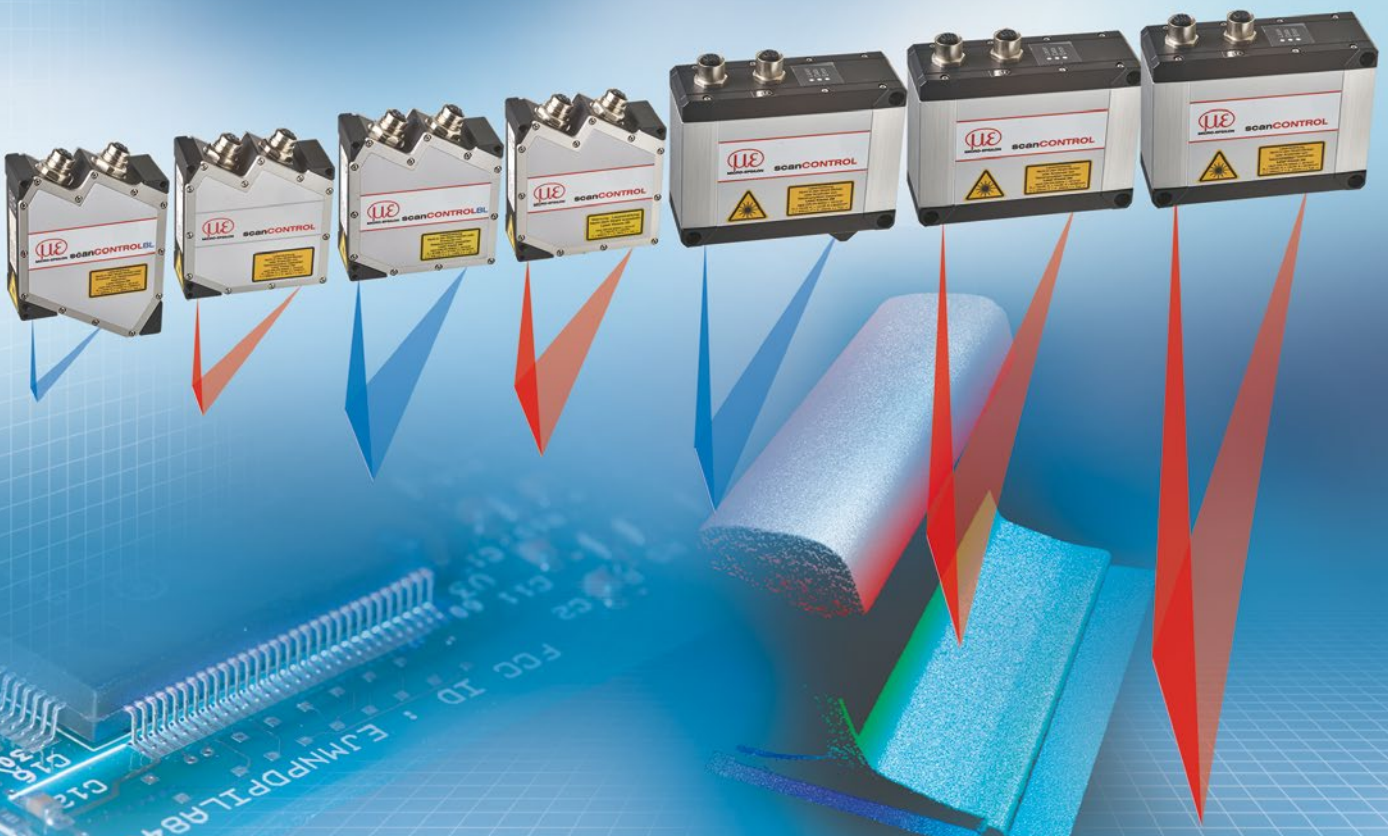

- Ideal for precise 2D/3D measurements
- Resolution (x-axis) 1,280 points
- High accuracy for the detection of finest details
- Profile frequency up to 2,000 Hz
- Also available with patented Blue Laser Technology
- Compatible with **COGNEX® VisionPro**

**Compact design for precise measurements**

scanCONTROL 29x0 laser scanners are designed for industrial measurement tasks where compact design and high accuracy are required. Thanks to their high resolution, versatility and excellent price-performance ratio, the scanners are particularly suitable for static and dynamic applications, e.g., on robots. They measure and evaluate, e.g., angles, steps, gaps, distances and extreme values.

**Available as COMPACT and SMART versions**

The scanCONTROL 29x0 series is available as COMPACT and SMART versions. The COMPACT scanners provide calibrated profile data that can be further processed on a PC with software evaluation provided by the customer. SMART scanners operate autonomously and provide selected measurement values. The sensor parameters and the desired measuring programs are set in the scanCONTROL Configuration Tools software and directly stored in the internal controller.

**Small measuring range with high resolution**

With a laser line of just 10 mm, the scanCONTROL 29x0-10/BL models recognize the finest of details and structures. The high profile resolution combined with the blue laser line allow for maximum precision in versatile applications, e.g., monitoring in electronics production.

**Article designation**

LLT	29	00	-25	/SI
Options - see below				
<b>Measuring range</b>				
10 mm (only Blue Laser)				
25 mm				
50 mm				
100 mm				
<b>Class</b>				
00=COMPACT				
10=SMART				
50=HIGHSPEED				
60=HIGHSPEED SMART				
<b>Series</b>				
LLT29x0				

**Laser options\***

	/SI	Hardware switch-off of the laser line
	/3B	Increased laser power (class 3B, ≤ 20 mW), e.g., for dark surfaces
	/BL	Blue laser line (405 nm) for (semi-) transparent, red-hot glowing and organic materials

**Cable output options\***

	/PT	Cable directly out of the sensor ("Pigtail") Length 0.3 m
	/VT	Cable directly out of the sensor ("Variable Tail") Length 0.1 ... 1.0 m (freely selectable)


\*Options can be combined

Model		LLT29x0-10/BL	LLT 29xx-25		LLT 29xx-50		LLT 29xx-100	
Available laser type		Blue Laser	Red Laser	Blue Laser	Red Laser	Blue Laser	Red Laser	Blue Laser
Z-axis	Measuring range	Start of measuring range	52.5 mm	53.5 mm	70 mm	190 mm		
		Mid of measuring range	56.5 mm	66 mm	95 mm	240 mm		
		End of measuring range	60.5 mm	78.5 mm	120 mm	290 mm		
		Height of measuring range	8 mm	25 mm	50 mm	100 mm		
	Extended measuring range	Start of measuring range	-	53 mm	65 mm	125 mm		
		End of measuring range	-	79 mm	125 mm	390 mm		
Linearity <sup>1)2)</sup>		1 $\mu$ m	2 $\mu$ m	4 $\mu$ m	12 $\mu$ m			
		$\pm 0.0125$ %	$\pm 0.008$ %	$\pm 0.008$ %	$\pm 0.012$ %			
X-axis	Measuring range	Start of measuring range	9.4 mm	23.4 mm	42 mm	83.1 mm		
		Mid of measuring range	10 mm	25 mm	50 mm	100 mm		
		End of measuring range	10.7 mm	29.1 mm	58 mm	120.8 mm		
	Extended measuring range	Start of measuring range	-	23.2 mm	40 mm	58.5 mm		
		End of measuring range	-	29.3 mm	60 mm	143.5 mm		
Resolution		1,280 points/profile						
Profile frequency	Standard	up to 300 Hz						
	Highspeed	up to 2,000 Hz						
Interfaces	Ethernet GigE Vision	Output of measurement values Sensor control Profile data transmission						
	Digital inputs	Mode switching Encoder (counter) Trigger						
	RS422 (half-duplex) <sup>3)</sup>	Output of measurement values Sensor control Trigger Synchronization						
Output of measurement values	Ethernet (UDP / Modbus TCP); RS422 (ASCII / Modbus RTU) analog <sup>4)</sup> ; switch signal <sup>4)</sup> PROFINET <sup>5)</sup> ; EtherCAT <sup>5)</sup> ; EtherNet/IP <sup>5)</sup>							
Control and display elements	3x color LEDs for laser, data and error							
Light source		-	$\leq 8$ mW					
	Red Laser	-	Standard: laser class 2M, semiconductor laser 658 nm					
		-	$\leq 20$ mW					
		-	Option: laser class 3B, semiconductor laser 658 nm					
	Blue Laser		$\leq 8$ mW					
	Laser switch-off	Standard: laser class 2M, semiconductor laser 405 nm						
Aperture angle of laser line		10°	20°	25°	25°			
Permissible ambient light (fluorescent light) <sup>1)</sup>		10,000 lx						
Protection class (DIN EN 60529)		IP65 (when connected)						
Vibration (DIN EN 60068-2-27)		2 g / 20 ... 500 Hz						
Shock (DIN EN 60068-2-6)		15 g / 6 ms						
Temperature range	Storage	-20 ... +70 °C						
	Operation	0 ... +45 °C						
Weight		440 g (without cable)			380 g (without cable)			
Supply voltage		11 ... 30 VDC, nominal value 24 V, 500 mA, IEEE 802.3af class 2, Power over Ethernet (PoE)						

<sup>1)</sup> According to measuring range; Measuring object: Micro-Epsilon standard object  
<sup>2)</sup> According to a one-time averaging over the width of the measuring field (640 points)  
<sup>3)</sup> RS422 interface, programmable either as serial interface or as input for triggering/synchronization  
<sup>4)</sup> Only with 2D/3D Output Unit  
<sup>5)</sup> Only with 2D/3D Gateway


LLT29x0-10/BL

Blue Laser

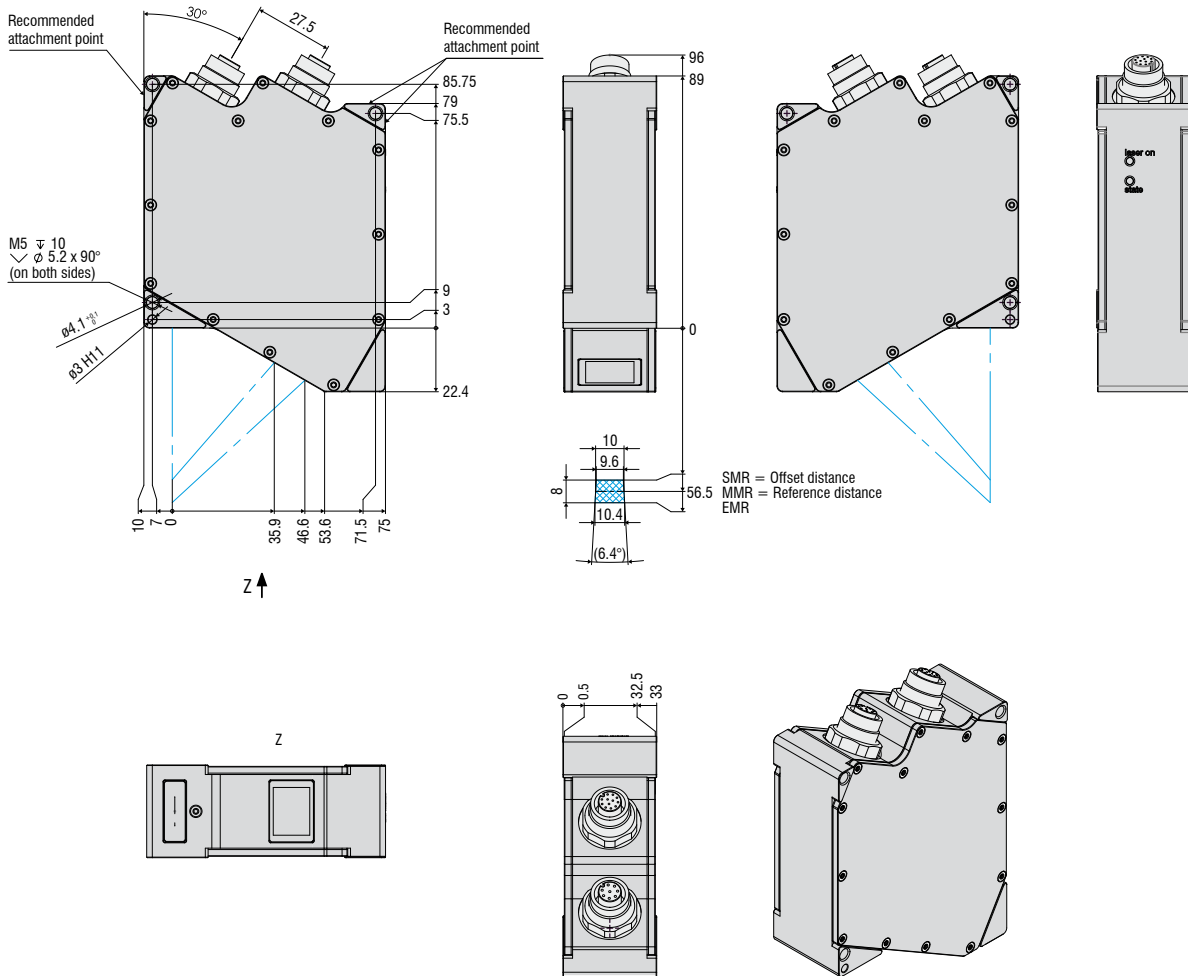


# LLT25x0-25 / LLT29x0-25

Red Laser    Blue Laser

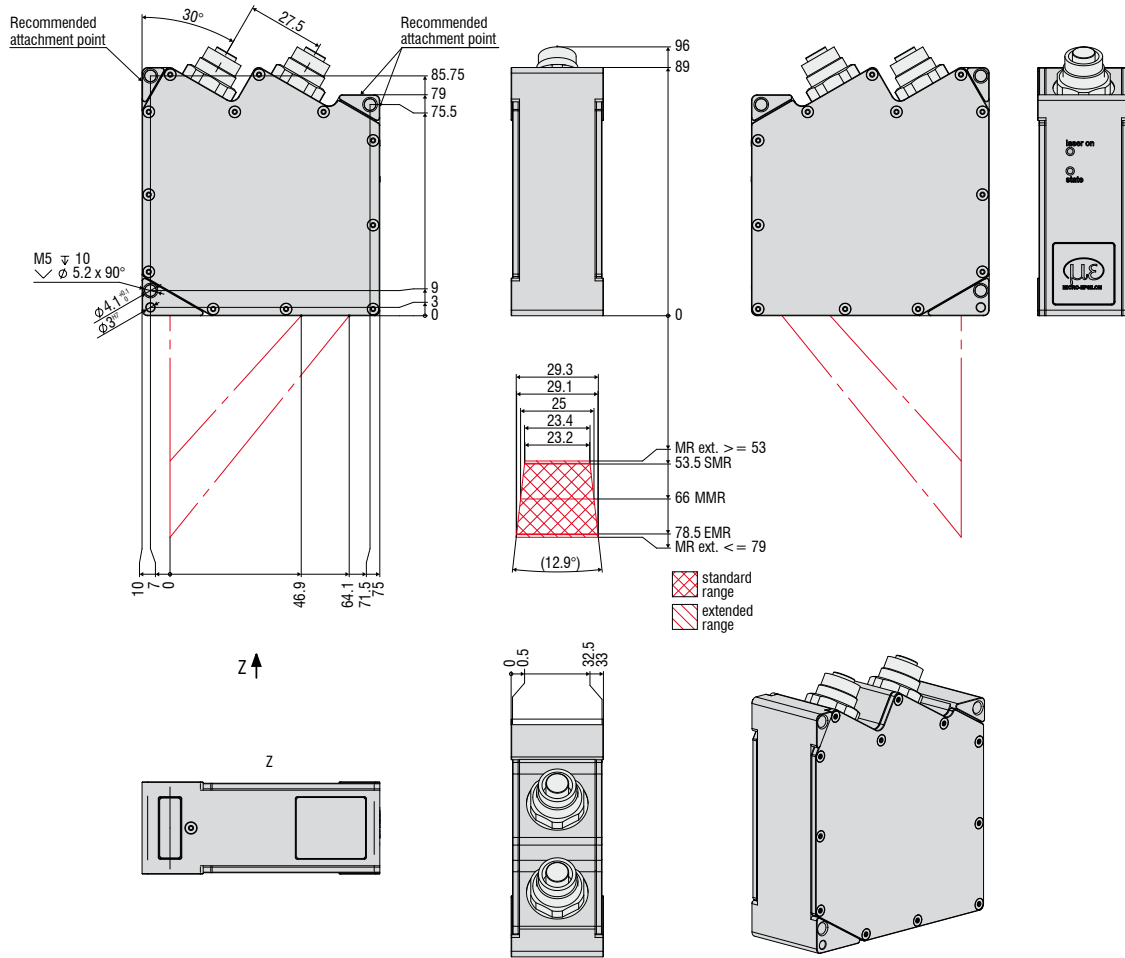


LLT25x0-50 / LLT29x0-50

Red Laser Blue Laser

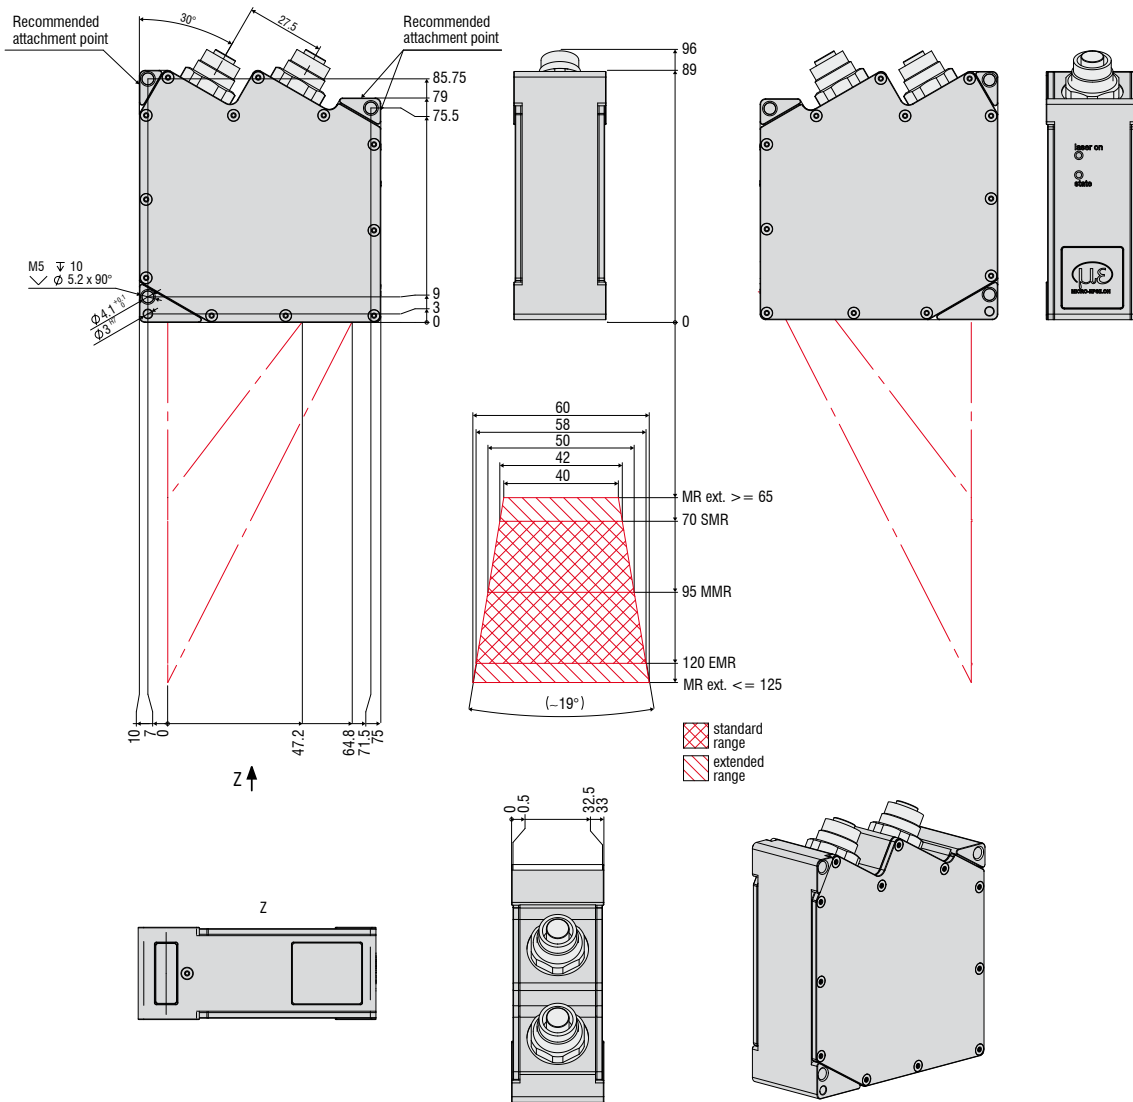

# LLT25x0 -100 / LLT29x0-100

Red Laser Blue Laser

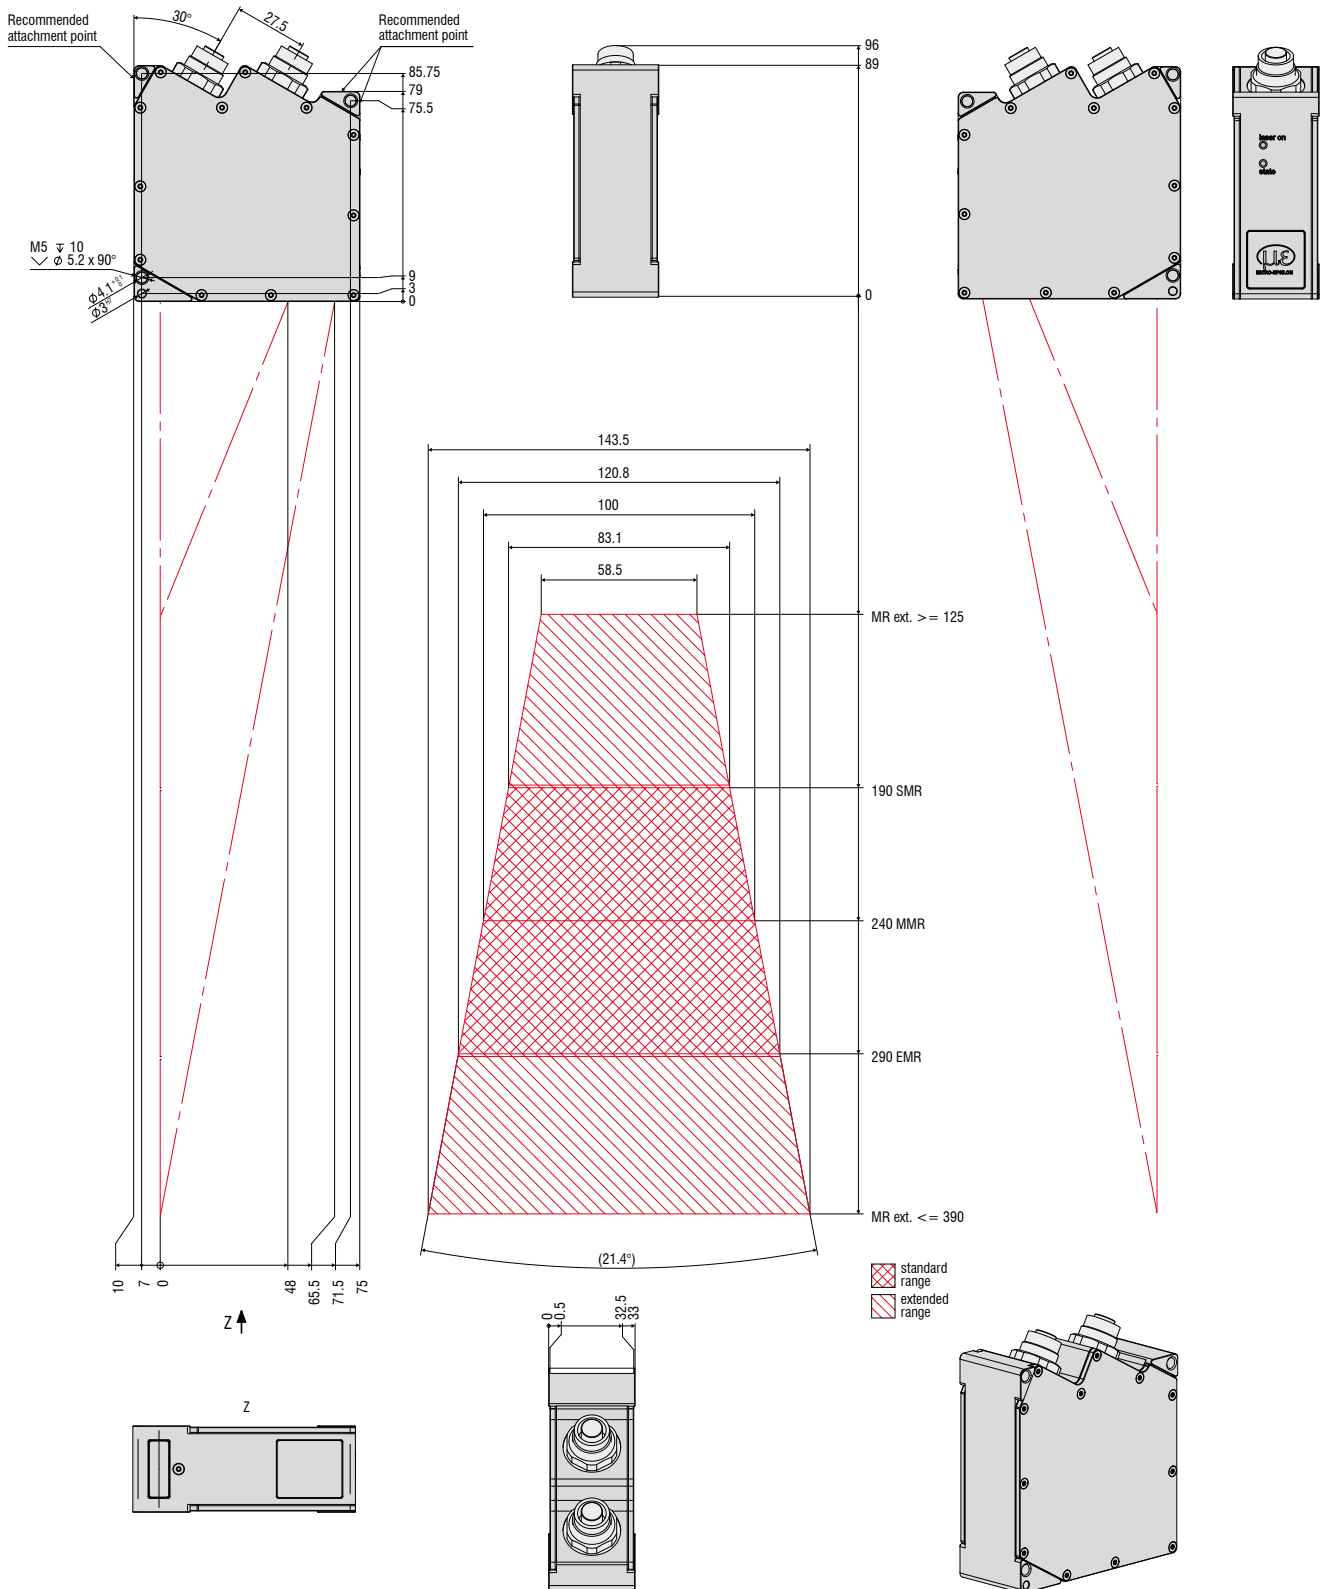



## Sensors and Systems from Micro-Epsilon




Sensors and systems for displacement, position and dimension



Sensors and measurement devices for non-contact temperature measurement



Measuring and inspection systems for quality assurance

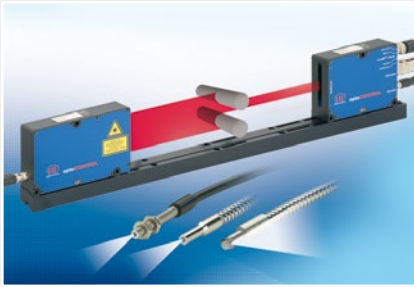

Optical micrometers, fiber optics, measuring and test amplifiers



Color recognition sensors, LED Analyzers and inline color spectrometers



3D measurement technology for dimensional testing and surface inspection

